


TIMES MICROWAVE SYSTEMS

358 Hall Avenue/P.O. Box 5039
Wallington, CT 06492-5039
Tel: 203-949-8400
FAX: 203-949-8423
1-800-TMS-COAX
www.timesmicrowave.com


INSTALLATION INSTRUCTIONS EZ-240-QM-RA (TIMES 3190-1539) (Cable Types: LMR-240)

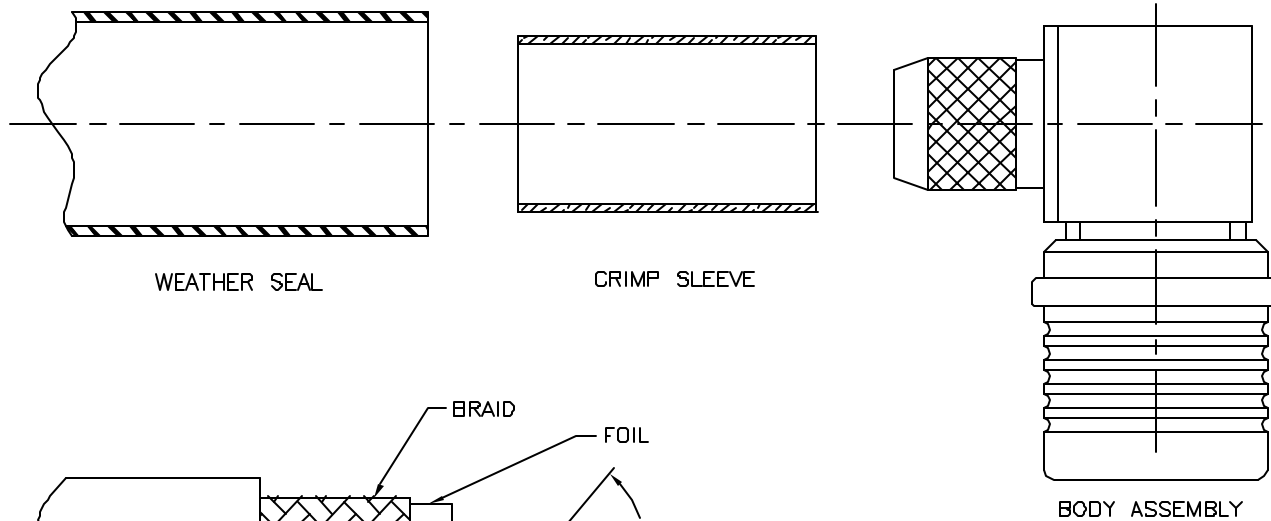

WEATHER SEAL


CRIMP SLEEVE

BODY ASSEMBLY

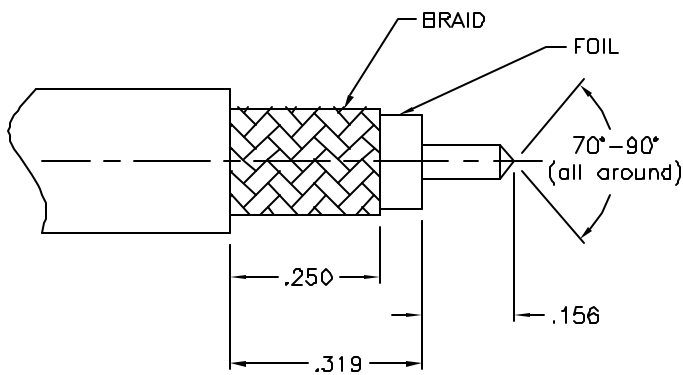

1. A. Trim cable per dimensions shown.
B. Remove any residual plastic from the center conductor and deburr center conductor using a fine file.

2. A. Slide crimp sleeve and weather seal over cable.

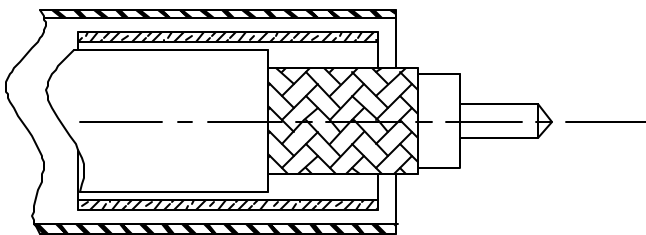

3. A. Insert cable into connector until fully seated, with all braid wires on the outside of connector body and aluminum tape inside the connector body. Slide cable forward until center conductor snaps into center contact.
B. Slide crimp sleeve forward and crimp as close as possible to body using a .255" hex die. Use Times HX-4 crimp tool or equivalent. Do not crimp rear of crimp sleeve.
C. Heat shrink weather seal over rear of connector body and down onto cable jacket using hot air gun.

