


REV. STATUS SHEETS	REV. LTR.	REVISIONS					
	SHEET NO	1	LTR	DESCRIPTION	DATE	BY	
			-	Released	12/29/98	JCL	

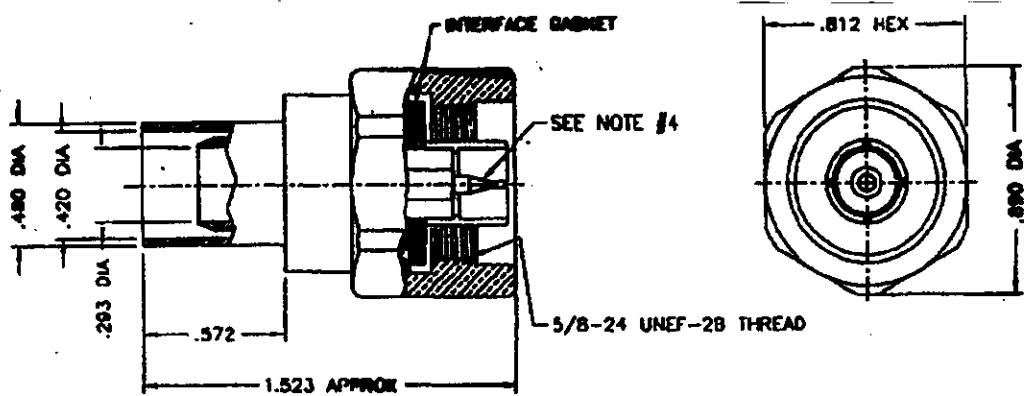

Materials & Finishes

Center Contact: Gold (50u") Plated Brass (solder-on)
 Outer Contact: Silver Plated (200u") Brass
 Other Metal Parts: Silver Plated (200u") Brass
 Dielectric: Teflon
 Gasket: Silicone Rubber
 Cable Attachment: Crimp

Electrical Properties

Impedance: 50 Ohms
 Working Voltage: 1000 Volts (RMS max)
 VSWR: 1.25:1 (max) up to 3 GHz
 Insertion Loss: <0.15 dB up to 3 GHz

Unless otherwise specified dimensions in inches. Tolerances are applicable when specified.	Approvals			TIMES MICROWAVE SYSTEMS Wallingford, CT 06492		
	Drawn	JCL	12/29/98	TC-400-NMH-PL Type N Male (Solder-pin) Crimp Connector for LMR-400-LLPL		
	Check					
	PrjMg			Size	Code Ident	Dwg.No.
	PrdMg			A	68999	3190-759
QAMgr			Scale: NA		Sheet: 1 of 1	